

LANDSCAPE FULLVIEW 2 SERIES  
Built-in Clean Face Electric Fireplace














# LANDSCAPE FULLVIEW 2 SERIES

## Built-in Clean Face Electric Fireplace

The Landscape FullView 2 built-in electric fireplace is the first of its kind creating a perfect substitute for a linear gas fireplace. This unique frameless design allows for edge to edge flame presentation as well as unlimited surround capabilities. Available in 5 different lengths for any application as well as 3 customizable flame bed options for different fit and finishes. An optional 2 stage heater is also included for supplemental heat up to 450 square feet.



### STANDARD FEATURES

-  Realistic Natural Flame Appearance
-  Orange/Blue Color Changing Flame
-  Glowing Coal Ember Bed
-  5,000 BTU Heater
-  Full Flame Viewing Area
-  Fully Finished Clean Face Installation
-  Affordable Alternative to Gas
-  Can be Installed Beneath a TV
-  Cool to the Touch with Heat On or Off
-  Remote Control
-  Wall Tether Touch Screen Control

# LANDSCAPE FULLVIEW 2 SERIES

Available in 5 Linear Widths with Orange or Blue Changeable Flames



Fireplace Height 15" with 5 Widths Available: 40" 60" 80" 100" 120"



Blue Flames shown with Standard Media – Standard & Dusted w/paint

Orange Flames shown with Standard Media – Standard & Dusted w/paint

### MEDIA UPGRADES



LFV2-40/15-SH with DWLS-4015



LFV2-40/15-SH with GC-4015 & BGC-40/15  
Can be Ordered Separately



# LANDSCAPE FULLVIEW 2 SERIES

## Technical Specs



### REMOTE CONTROL

Separate controls for on/off variable heat and variable flame.




### TOUCH SCREEN TECHNOLOGY

Touch control panel can be wall mounted within ten feet of the fireplace. The 3 stacked icons (in order) operate the power, heat (on/off) and light intensity. Hold the light intensity for five seconds to change the flame color from orange to blue. All touch controls fade to black after 4 seconds.

MODEL #	VOLTS	WATTS	BTU's	FRAMING (ROUGH OPENING)	INSTALLATION TYPE
LFV2-40/15-SH	AC 120V / 60Hz	1,530	5,000	55 3/4" L x 12" D x 23" H	Built-In Clean Face
LFV2-60/15-SH	AC 120V / 60Hz	1,530	5,000	75 3/4" L x 12" D x 23" H	Built-In Clean Face
LFV2-80/15-SH	AC 120V / 60Hz	1,550	5,000	95 3/4" L x 12" D x 23" H	Built-In Clean Face
LFV2-100/15-SH	AC 120V / 60Hz	1,600	5,000	115 3/4" L x 12" D x 23" H	Built-In Clean Face
LFV2-120/15-SH	AC 120V / 60Hz	1,600	5,000	135 3/4" L x 12" D x 23" H	Built-In Clean Face

### LFV2-60/15-SH TECHNICAL DRAWING SHOWN

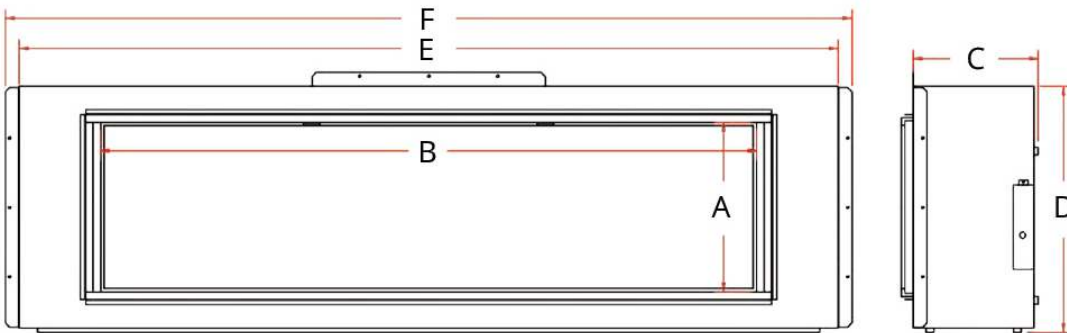

MODEL #	A	B	C	D	E	F
LFV2-40/15	15"	40"	11½"	22½"	54¾"	57¼"
LFV2-60/15	15"	60"	11½"	22½"	74¾"	77¼"
LFV2-80/15	15"	80"	11½"	22½"	94¾"	97¼"
LFV2-100/15	15"	100"	11½"	22½"	114¾"	117¼"
LFV2-120/15	15"	120"	11½"	22½"	134¾"	137¼"

